


Product Catalog

As a trusted manufacturer in Iran and a globally recognized brand, Vispar specializes in delivering innovative solutions for irrigation, industrial piping, and thermoplastic valves. With nearly two decades of expertise, we have been committed to supporting agriculture, oil and gas, water desalination, and other vital sectors with high-quality products designed for efficiency, durability, and performance.

Our portfolio includes a wide range of polymer-based products, including advanced drip and sprinkler irrigation systems, PVC-U and PVC-C pipes, and industrial fittings. With a passionate team of over 1,000 professionals, we are committed to enhancing water management and energy efficiency. Vispar exports its products to numerous countries across the Middle East, Europe, and beyond. Driven by a commitment to excellence, innovation, and sustainability, we proudly support industries and communities worldwide in conserving resources and boosting productivity.




True Union Ball Valve

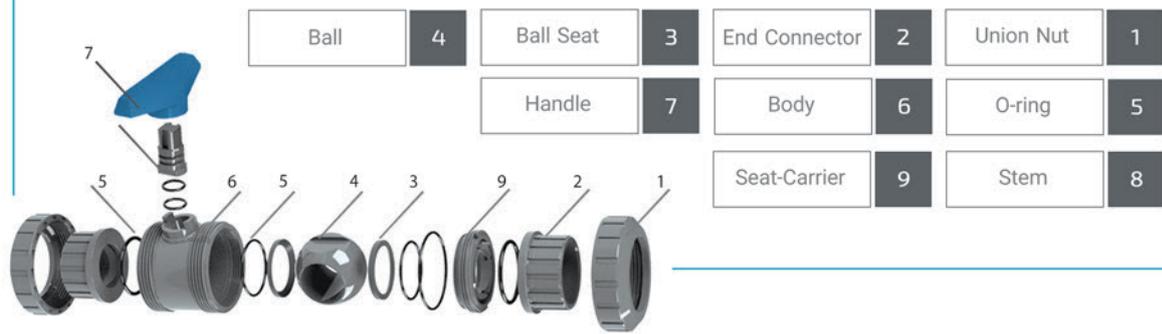

Description

- Material
- Nominal Pressure: 16 bar
- Size: 20 - 110 mm
- Temperature Range: 0 - 60 °C


Body: U-PVC
 Ball: U-PVC
 Ball Seat: PTFE, TPV
 O-rings: EPDM, VITON

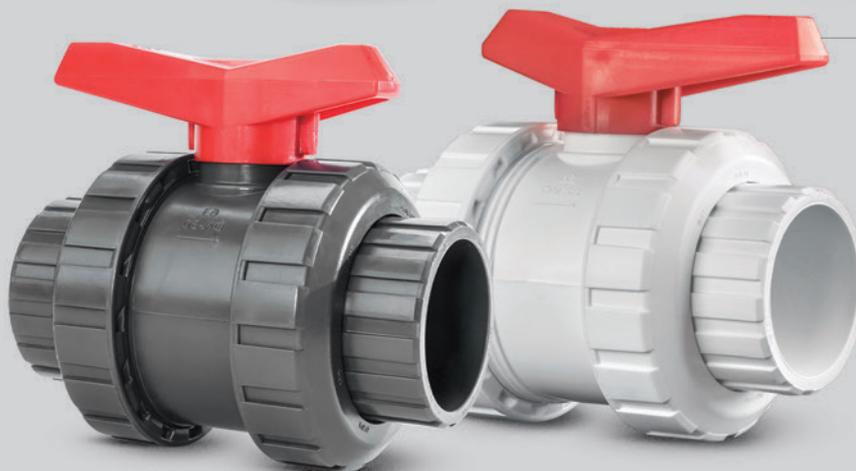

- Material:
Body: PP
Ball: PP
- Nominal Pressure: 10 bar
- Temperature Range:
0 - 80 °C

Anti Acid

Spring Check Valve

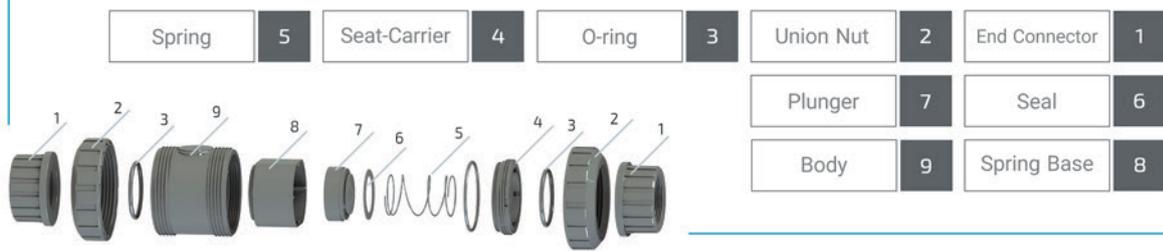

Tee Check Valve



1	Threaded Plug	2	O-ring
3	Body	4	Disk

Description

- Material
 - Body: U-PVC
 - Disk/Seal-Carrier: U-PVC
 - O-rings: EPDM, VITON
 - Spring : SS 316, SS 304
- Nominal Pressure: 16 bar
- Size:
 - Spring Check Valve: 20 - 110 mm
 - Tee Check Valve: 50, 63 mm
- Temperature Range: 0 - 60 °C



U-PVC Solvent Cement Pipes & Fittings

Description

- Standards: ISIRI 13361
- Nominal Pressure: 16 bar
- Temperature Range: 0 - 60 °C
- Size: 20 - 110 mm



Tee 90°



One Side Female Thread Tee



Cross 90°



Tee 45°



Reducing Tee



On Side Female Threaded Reducer



Reducer



Socket



Female Threaded Adaptor




Male Threaded Adaptor



Wall Cross Flange



Flange Adaptor



Female Threaded Flange Adaptor



Cap

U-PVC Pipes

Description

- Standards: ISIRI 13361
- Nominal Pressure: 16 bar
- Nominal Diameter: 20 - 315 mm
- Length: 5m
- Temperature Range: 0 - 60 °C





One Side Female Threaded Union



Union



Brass Outlet Female Threaded Union



Brass Male Threaded Union



Flange



Elbow 45°




One Side Female Threaded Elbow



Elbow 90°



One Side Male Threaded Union

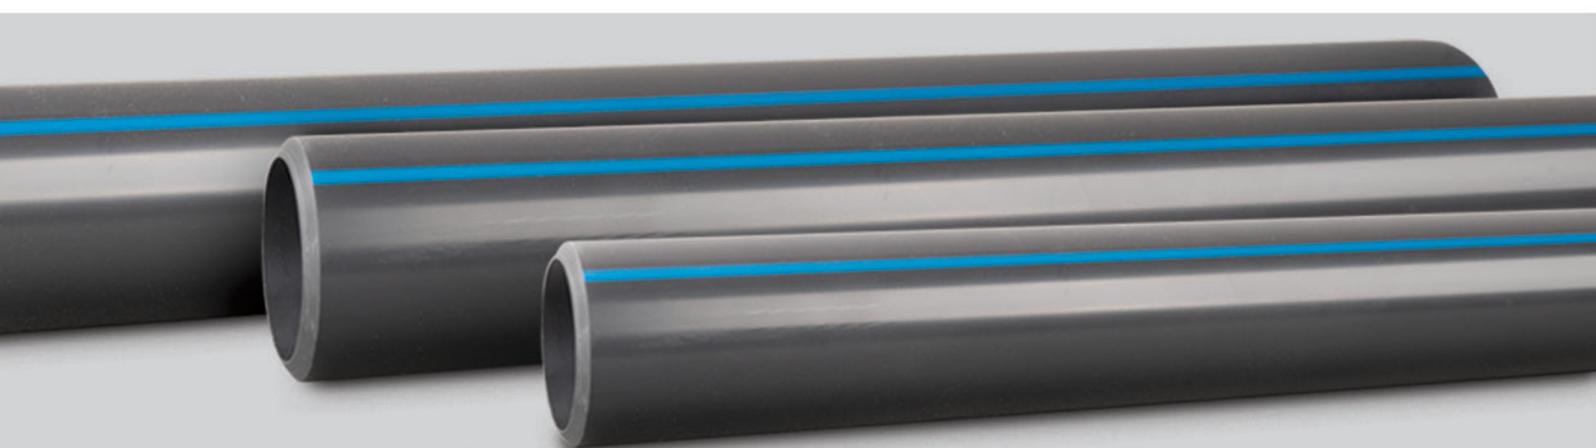

U-PVC Threaded Fittings

Description

- Nominal Pressure: 16 bar
- Temperature Range: 0 - 60 °C
- Standards:
ISIRI 13361, ISO1452
ISO15493



Male Elbow
Size: 2 Inch



Female Elbow
Size: 1/2 - 3 Inch



Female Tee
Size: 1/2 - 3 Inch



Nipple
Size: 1/2 - 4 Inch



Equal Bush
Size: 1/2 - 3 Inch



Cap
Size: 1/2 - 3 Inch




Male Tee
Size: 2 Inch



Male-Female Elbow
Size: 1/2 - 3 Inch



Plug
Size: 1/2 - 3 Inch



Reducing Bush
Size: 1/2 - 3 Inch




Reducer
Size: 1/2 - 2 Inch



Threaded Union
Size: 1 - 2 Inch



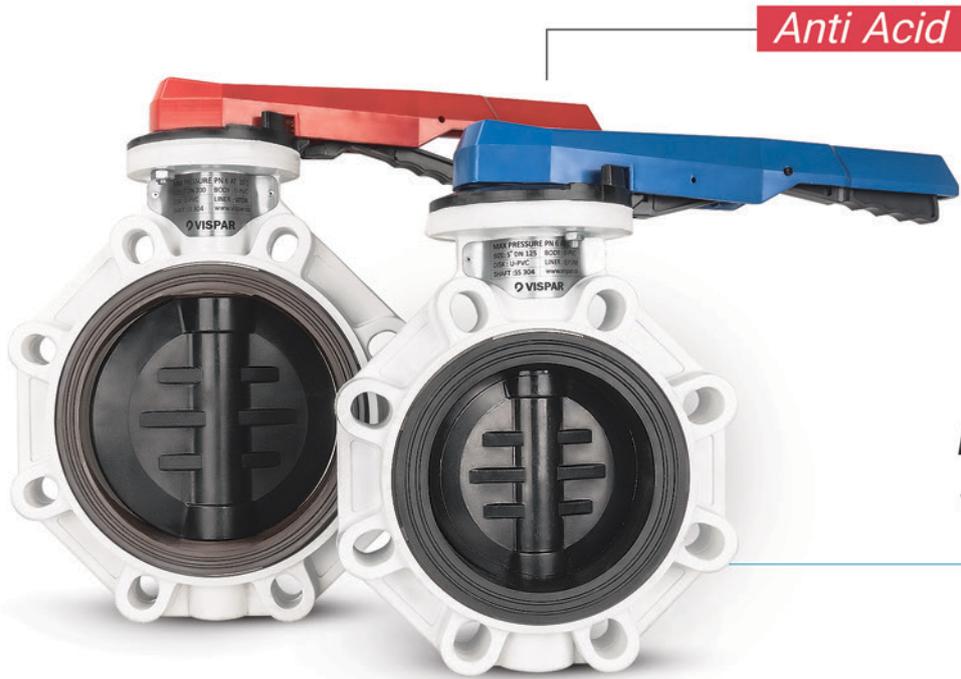

Anti Acid

Butterfly Valve

Description

- Material
- Nominal Pressure:
2"-5": 10 bar
6"-10": 6 bar
- Temperature Range:
U-PVC: 0 - 60 °C
CPVC: 0 - 90 °C
PP: 0 - 80 °C

Body: U-PVC
Disk: U-PVC, CPVC, PP
Liner: EPDM, VITON
Shaft: SS304, SS316L


Standards
Construction: ISO 16136



Butterfly Valve with Gearbox



Butterfly Valve with Actuator

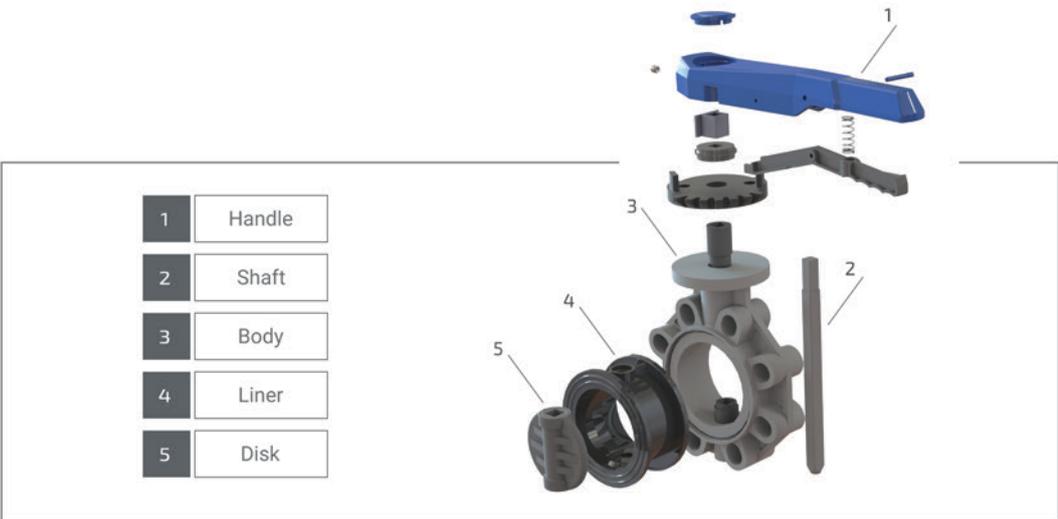

- Headquarters

6th Floor, No. 19, Unique building, Alvand St.,

Argentina Sq., Tehran, Iran

Tel Fax: +98 21 42 40 7000

Direct tel: (021) 42 40 7300

- Factory

Bu Ali Industrial Town, Hamedan, Iran

- Hamedan Office

No. 27, Rostami Alley, Rokni St., Hamedan, Iran

www.vispar.co 

Export@vispar.co 

[vispar_industrial](#) 

+989124044906 